

Ethanol production from cassava peels using *Saccharomyces cerevisiae* via ethanologenic fermentation process

Adewale Allen Soka-Adeaga, Godson R.E.E. Ana,
Abel Olajide Olorunnisola, Micheal Ayodeji Soka-Adeaga,
Hridoy Roy, Md Sumon Reza and Md. Shahinoor Islam
(Information about the authors can be found at the end of this article.)

Abstract

Purpose – This study aims to assess the effect of water variation on bioethanol production from cassava peels (CP) using *Saccharomyces cerevisiae* yeast as the ethanologenic agent.

Design/methodology/approach – The milled CP was divided into three treatment groups in a small-scale flask experiment where each 20 g CP was subjected to two-stage hydrolysis. Different amount of water was added to the fermentation process of CP. The fermented samples were collected every 24 h for various analyses.

Findings – The results of the fermentation revealed that the highest ethanol productivity and fermentation efficiency was obtained at $17.38 \pm 0.30\%$ and $0.139 \pm 0.003 \text{ g L}^{-1} \text{ h}^{-1}$. The study affirmed that ethanol production was increased for the addition of water up to 35% for the CP hydrolysate process.

Practical implications – The finding of this study demonstrates that *S. cerevisiae* is the key player in industrial ethanol production among a variety of yeasts that produce ethanol through sugar fermentation. In order to design truly sustainable processes, it should be expanded to include a thorough analysis and the gradual scaling-up of this process to an industrial level.

Originality/value – This paper is an original research work dealing with bioethanol production from CP using *S. cerevisiae* microbe.

Highlights

- (1) Hydrolysis of cassava peels using $13.1 \text{ M H}_2\text{SO}_4$ at 100°C for 110 min gave high Glucose productivity
- (2) Highest ethanol production was obtained at 72 h of fermentation using *Saccharomyces cerevisiae*
- (3) Optimal bioethanol concentration and yield were obtained at a hydration level of 35% agitation
- (4) Highest ethanol productivity and fermentation efficiency were 17.3% , $0.139 \text{ g L}^{-1} \text{ h}^{-1}$

Keywords Bioenergy, Lignocellulosic biomass, Bioethanol, Glucose productivity, Fermentation

Paper type Research paper

© Adewale Allen Soka-Adeaga, Godson R.E.E. Ana, Abel Olajide Olorunnisola, Micheal Ayodeji Soka-Adeaga, Hridoy Roy, Md Sumon Reza and Md. Shahinoor Islam. Published in *Arab Gulf Journal of Scientific Research*. Published by Emerald Publishing Limited. This article is published under the Creative Commons Attribution (CC BY 4.0) licence. Anyone may reproduce, distribute, translate and create derivative works of this article (for both commercial and non-commercial purposes), subject to full attribution to the original publication and authors. The full terms of this licence may be seen at <http://creativecommons.org/licenses/by/4.0/legalcode>

The authors would like to thank the Board and Management of the Postgraduate College, University of Ibadan, Ibadan, Nigeria, for the financial support under the auspices of the Postgraduate Scholarship Scheme, which enabled the speedy and timely completion of this research.

Funding: This research was partly funded by the Scholarship Board of the Postgraduate College, University of Ibadan, Ibadan, Nigeria.

Ethical issues: The authors certify that this manuscript is the original work of the authors, and all data collected during the study are presented in this manuscript, and no data from the study has been or will be published separately elsewhere.

Conflicts of interest: The authors declare that they have no competing interests.



1. Introduction

The exploration for sustainable energy is increased because of enhanced use of energy in different sectors including industrial, agricultural, domestic, transport and other commercial purposes (Al-Mamun *et al.*, 2023; Reza *et al.*, 2023; Onuoha, Nwafor, Igbokwe, & Aviara, 2019). However, the reliance on fossil fuels as the primary source of energy has contributed to the emergence of global issues such environmental degradation and global warming (Oseji, Ana, & Sokan-Adeaga, 2017; Sokan-Adeaga, Ana, & Sokan-Adeaga, 2015). These prompted the government, industry and energy sector to search for ecologically friendly, renewable and sustainable energy (Kiran, Kumar, & Deshmukh, 2014; Bolade, Ana, Lateef, & Sokan-Adeaga, 2019). Liquid biofuels were given top priority among renewable energy sources because they account for nearly 40% of global energy use (Demirbas, 2008). Biofuels help to reduce dependency on fossil fuels for sustainable development by addressing environmental concerns, fuel security and socioeconomic advantages (Shah *et al.*, 2023; Sathish & Singaravelu, 2020). Utilizing liquid biofuels helps with supply security, job creation, regional development and a decrease in greenhouse gas emissions (Bolade *et al.*, 2019; Sokan-Adeaga & Ana, 2015a).

The most common biofuel utilized in the transportation industry is bioethanol (Sokan-Adeaga *et al.*, 2015). Since the 1980s, there has been an increased interest in using bioethanol, and many nations have considered using it as an alternative fuel (Tan, Lee, & Mohamed, 2008). With a modest decline in production in 2012 and 2013, global ethanol production climbed from 13.12 billion gallons in 2007 to 25.68 billion gallons in 2015 (Renewable Fuels Association, 2015). The USA produced approximately 15 billion gallons of ethanol in 2015, making it the world's top producer. Eighty-five percent of the world's ethanol production comes from the USA and Brazil (Mohd Azhar *et al.*, 2017). In comparison to gasoline, bioethanol has a higher octane number, larger flammability limits, faster flames and greater heat of vaporization (Ana & Sokan-Adeaga, 2015). Bioethanol is less harmful, easily biodegradable and emits fewer airborne pollutants than petroleum fuel (Sokan-Adeaga, 2022). The manufacturing of bioethanol has utilized a range of feedstocks from the first, second and third generations. The first generation of bioethanol uses starchy feedstocks including corn, wheat, rice, potato, cassava, sweet potato and barley as well as sucrose-rich feedstocks like sugar cane, sugar beet, sweet sorghum and fruits. The consequent strains on land use and food security, in addition to the price associated with the feedstocks, have made this technique unpopular (Tshizanga, Aransiola, & Oyekola, 2017). Lignocellulosic biomass, such as wood, straw and grasses, is the source of second-generation bioethanol. Biomass-derived from lignocellulose is abundant, freely accessible and a potential resource for the creation of cost-effective alternative fuels (Sokan-Adeaga, Godson, & Olorunnisola, 2023). Microalgae and macroalgae biomass have been used to produce third-generation bioethanol (Nigam & Singh, 2011). With its potential to increase its biomass weight quickly, its ability to acquire lipids quickly, its year-round harvesting cycles and its ease of exploiting sunlight, water and CO₂, microalgae is a viable choice for biofuel production (Rafa, Ahmed, Badruddin, Mofijur, & Kamangar, 2021; Yin *et al.*, 2020). By converting a variety of carbohydrates to ethanol through fermentation, microorganisms like yeast play a crucial part in the creation of bioethanol. They are used in industrial plants because of their beneficial characteristics, including their high theoretical yield of ethanol (>90.0%), high tolerance and productivity levels of ethanol (>1.0 g/L/h), ability to grow on basic, inexpensive media and undiluted fermentation broth, resistance to inhibitors and ability to delay the effects of contaminants on growth conditions (Dien, Cotta, & Jeffries, 2003). Yeasts, the primary element in fermentation, have an impact on the output of ethanol.

There is currently a lot of penchant for bioethanol production as a sustainable bioenergy source by increasing the yield while lowering the cost of production through the use of low-

cost substrates, efficient fermentative organisms and process parameter modification (Sokan-Adeaga, Ana, Sokan-Adeaga, & Sokan-Adeaga, 2016). Biomass's availability and renewability are crucial for the manufacture of bioethanol. The largest source of renewable, possibly fermentable carbohydrates on earth is lignocellulosic biomass. Lignocelluloses are a substrate of significant biotechnological significance due to the chemical characteristics of their constituent parts (Sokan-Adeaga & Ana, 2018; Sokan-Adeaga, 2019).

Due to the amount of land and variety of biomass resources in Nigeria, bioenergy feedstock is not only plentiful but also widely accessible (Elijah, 2010). Nigeria produces the most cassava in the world and has the most oil palm farms, which is an excellent source of biodiesel (Abiodun, 2007). Due to their high dry matter content, high biomass production and ease of hydrolyzability, the non-food components of cassava have the potential to be extremely important in the energy generation process (Nuwamanya, Chiwona-Karlton, Kawuki, & Baguma, 2012). Given the massive amount of cassava peels (CP) produced nationwide, it is intriguing to note that Nigeria might also be a significant participant in the biofuel sector. Nevertheless, Nigeria has not been able to fully utilize these biomasses (Sokan-Adeaga & Ana, 2015b). Therefore, boosting the production and demand for bioethanol can be a substitute for conventional energy sources. This can be achieved through the development of technology that uses agricultural wastes as the only substrate for the production of bioethanol; however, this process has not been fully optimized (Adegbehingbe, Faparusi, & Adeleke, 2021).

Among the eukaryotes utilized in a wide range of industrial activities, including the manufacture of ethanol, *Saccharomyces cerevisiae* is without a doubt the most extensively researched (Parapouli, Vasileiadis, Afendra, & Hatziloukas, 2020). The yeast *S. cerevisiae* possesses a number of advantageous industrial traits, including quick development, effective anaerobic glucose metabolism, high ethanol production, excellent yield and strong tolerance to a variety of environmental stressors, including high ethanol concentrations, low pH and low oxygen levels (da Silva Fernandes *et al.*, 2022). Global alcohol production currently exceeds 100 billion liters per year, and the most common industrial microbe utilized to produce ethanol is *S. cerevisiae* (Walker & Walker, 2018). Even while the different *S. cerevisiae* strains employed in these procedures have adapted well, there is still a lot of room for improvement in terms of either maximizing the potential of already available strains or taking advantage of the vast natural reservoir of environmental isolates (Parapouli *et al.*, 2020). Therefore, using *Saccharomyces cerevisiae* as the ethanologenic organisms in our study, we investigated the impact of altering water content on the generation of bioethanol from CP. The novelty of this investigation is that it provides data on the effect of water on the ethanol production capacity of *S. cerevisiae* via Separate Hydrolysis and Co-Fermentation (SCHF) technique which hitherto is sparsely available thus enriching the existing database.

2. Materials and methods

2.1 Experimental design


The substrate CP was collected from the cassava processing centre at the International Institute of Tropical Agriculture (IITA), Ibadan, Nigeria. A significant amount of the biomass was collected in polythene bag to carry out the experiment. The CP was air-dried until all moisture was removed. The dried CP was milled using a mortar and pestle and sieved with a +1.5 mm sieve to get homogeneous powder. The microbial fermentation of CP was carried out using *S. cerevisiae* as the ethanologenic microorganism to produce bioethanol. SHCF technique was also employed for bioethanol production. The experimental process consisted of biomass pre-treatment, chemical hydrolysis of biomass, neutralization process (to separate the sugars from acid), fermentation process and distillation of fermented products followed

by analysis (Sokan-Adeaga *et al.*, 2015; Bolade *et al.*, 2019; Ana & Sokan-Adeaga, 2015; Farone & Cuzens, 1996a, 1996b).

The microbial fermentation optimization phase was divided into three experimental groups as described by Hossain *et al.* (2011). This was done to assess the effect of varied degrees of hydration treatments on the total soluble solids (TSS), pH and bioethanol concentration of samples before and after fermentation at 30°C, respectively. An equal mass of 20 g of milled CP was utilised for each treatment group. The experimental plan is shown in Table 1.

2.2 Hydrolysis of the biomass

A 100 ml of 13.1 M H₂SO₄ was mixed with 20 g of each of the milled CP separately (1:5 (w/v) ratio) in a glass container with a cover lid. The combination was heated at 100 °C for 60 min in a water bath to form a thick gel that was squeezed through a sieve to produce the first hydrolysate (acid-sugar stream). Thereafter, the second hydrolysis on the leftover solid at 100 °C was carried out for 50 min using the same quantity of acid as used in the first stage. This also produced a thick gel which was sieved to obtain the second hydrolysate. The two hydrolysates were combined and the total volume was recorded. The total hydrolysis time was 110 min. The reaction of lignocellulosic materials to reducing (acidic) sugar is shown in Eqn 1:



The reducing sugar obtained were neutralized with calcium hydroxide [Ca(OH)₂]aq solution to raise the pH to about 5.5 (Eqn. 2). With Whatman No. 1 filter paper, the solution was purified in order to obtain pure sugar solution. This was assessed qualitatively using the Fehling solution. Sample from the sugar solution was also taken for quantitative determination of total soluble solids (TSS), glucose and total reducing sugars (TRS) concentrations, respectively.




2.3 Sugars Fermentation

The fermentation process adopted in this study was the technique described by Hossain *et al.* [24]. The free sugar solution obtained (as described in Table 2) from the neutralization process was fermented with *S. cerevisiae* under aseptic conditions using the proportion of 3 g of yeast to 1 L of sugar solution (Eqn 3). Rehydration of the dry yeast was performed in a water bath at

Experiment	Mode of treatment
Experiment (Bottle 1) 1	0% water content serve as control
Experiment (Bottle 2) 2	15% water content treatment
Experiment (Bottle 3) 3	25% water content treatment
Experiment (Bottle 4) 4	35% water content treatment
Source(s): Authors work	

Table 1.
Experimental plan for
the optimization of
bioethanol production
from Cassava peel

40°C and thereafter added to the sugar solution after cooling. The optimization process was carried out by adding various quantities of water content (0%, 15%, 25% and 35%) of equivalent volumes of sugar solutions to each treatment group (Bottle 1, 2, 3 and 4), respectively, with the aim to ascertain how hydration affects bioethanol production. Ethanol presence, ethanol concentration and yield were carried out by periodically taken samples from the fermenting broth every 24 h. After fermentation, the solutions' pH and TSS were also assessed.



Ethanol presence was confirmed by adding a few drops of acidified KMnO₄ solution to 1 ml of each of the fermented broths and heated to boil. The presence of ethanol is confirmed by the decolorization of KMnO₄ to a colorless liquid with the evolution of a pungent smell of ethanal.

The fermentation efficiency (FE) and ethanol productivity (EP) were calculated using the formula described by [Zhu, Li, Gong, and Wang \(2012\)](#) in [Eqns 4-5](#):

$$FE (\%) = \frac{Ethanol\ concentration\ (gL^{-1}) \times 1}{Cassava\ peels\ conc. \times 51.52\% \times 1.1\ (gL^{-1}) \times 0.51} \times 100$$

(4)

$$Ethanol\ Productivity\ (gL^{-1}h^{-1}) = \frac{Ethanol\ concentration\ (gL^{-1})}{Fermentation\ time\ (hr)}$$

(5)

Note: FE = Fermentation Efficiency.

Thus, the obtained bioethanol solution was distilled to achieve pure ethanol at 78°C using a distillation flask. The ethanol volume obtained from the distillation was measured and recorded.

2.4 Analytical assay

The pH, TSS, glucose yield, TRS and bioethanol yield of the CP were analyzed. Physicochemical and proximate analyses of the produced ethanol were performed. pH meter was used to determine the pH of the solution. TSS was measured with the aid of a refractometer as described by [Hossain et al. \(2011\)](#). The Association of Official Analytical Chemists (AOAC) methods were used to calculate the concentrations of glucose and TRS ([Association of Official Analytical Chemists \(AOAC, 1984, 1990, 1998\), 1984](#)). The TRS content was quantitatively evaluated using the phenol-sulphuric acid method as highlighted by [Dubois, Gilles, Hamilton, Rebers, and Smith \(1956\)](#), while the glucose concentration was calculated using the Anthrone approach as defined by the A.O.A.C. (1984). The following [equations \(6\) and \(7\)](#) were used for the calculations of the original sample's glucose and TRS concentrations and yields.

Table 2.
Mean volume of sugar
solution obtained from
the 13.1 M acid
hydrolysis and
subjected to
fermentation

Samples	Volume of sugar solution (ml) (Mean ± SD)
Bottle 1	161.00 ± 7.00
Bottle 2	161.00 ± 1.00
Bottle 3	163.66 ± 2.51
Bottle 4	168.33 ± 1.52
Source(s): Authors work	

$$\text{Concentration } (C_1) = \frac{\text{Absorbance reading}}{\text{Gradient}} \quad (6)$$

$$\text{Yield} = \frac{(C_1 \times 125) \times 1000}{D} \text{ mg / kg dry weight} \quad (7)$$

where C_2 = Concentration of reducing sugars (mg/ml) read from the appropriate calibration graph, 125 = Dilution factor, since 2 g of the analyte was dissolved in 250 ml of the distilled water, D = Dry weight of the original sample, which is 20 g., and 1000 = Conversion factor, to convert the final value from mg/g to mg/kg.

Ethanol concentration was quantitatively determined by UV Spectrophotometer using acidified potassium dichromate solution at a wavelength of 313 nm (AOAC, 2000, 2012; Sayyad, Chardhari, & Panda, 2015). The ethanol concentration and yield were calculated using Eqns 8 and 9.

% Ethanol (g/100ml) was calculated, viz.:

$$= \frac{(AbS - AbB) \times AG}{\text{Volume of sample taken}} \times 100 \quad (8)$$

$$\text{Ethanol Yield} = \frac{C \times V \times 50 \times 10^6}{\text{Density of ethanol}} \frac{\text{ml}}{\text{kg dry weight}} \quad (9)$$

where AbS = Absorbance of Sample, AbB = Absorbance of Blank, AG = Average Gradient, C = Concentration of ethanol (mg/ml) [multiply with 10^{-6} to convert from mg/ml to kg/ml, V = Volume of sugar (ml) and 50 = Multiplication factor used to extrapolate the result from the original sample of 20 to kg, Density of ethanol = 789 kg/m^3 . 10^6 = Conversion factor to convert final answer from m^3/kg to cm^3/kg (ml/kg).

3. Data analysis

The IBM Statistical Product and Service Solutions (IBM SPSS Statistics), version 27.0 software for descriptive and inferential statistics, was used to analyze the data. Descriptive statistics, including bar charts, line graphs, means and standard deviations, were used to summarize the data. The findings of the laboratory analyses were subjected to a one-way Analysis of Variance as stated by the Statistical Analysis System (1997) and a New Duncan's Multiple Range Test (1955) for means separation at the 95% level of probability.

4. Results

4.1 Hydrolysis results of the cassava peels

The results for Glucose concentration, Glucose Hydrolysis Efficiency (GHE) %, Glucose Productivity, TRS concentration and TRS Productivity at the hydrolysis stage are shown in Figure 1. The overall mean Glucose and TRS concentrations obtained from the CP were 19.00 ± 0.19 and $35.92 \pm 1.02 \text{ gL}^{-1}$ respectively. Likewise, the overall mean GHE %, Glucose Productivity and TRS productivity of the CP were $16.77 \pm 0.07\%$, 10.37 ± 0.04 and $19.60 \pm 0.56 \text{ gL}^{-1}\text{h}^{-1}$, respectively. All these results imply a promising yield of sugar production from CP using the described hydrolysis method.

4.2 Optimization studies

Table 3 illustrates the effect of unequal amount of water treatments (0%, 15%, 25% and 35%) on the mean TSS, pH and bioethanol concentration of the CP hydrolysate. In Figure 2, the

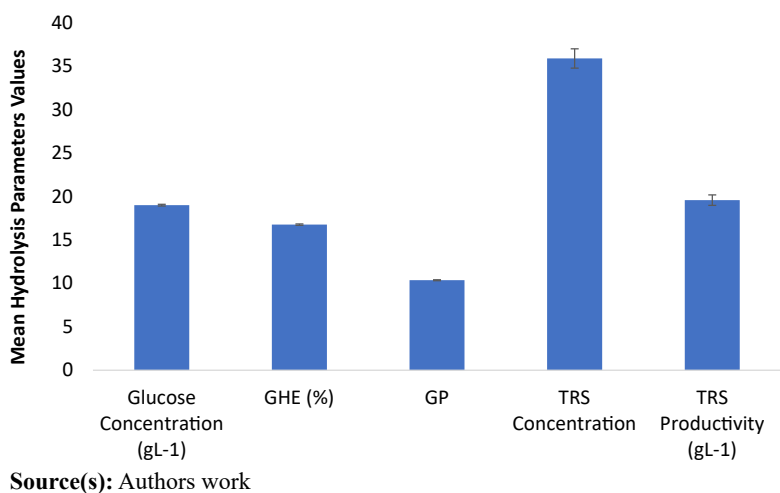


Figure 1.
Results of hydrolysis
parameters

Source(s): Authors work

results from the fermented CP broths depicted that the mean bioethanol concentration varied between 0.89 and 1.00%. The lowest concentration of $0.89 \pm 0.01\%$ (w/v) was produced in Bottle 1 (control), i.e. without water, while the highest concentration of $1.00 \pm 0.02\%$ (w/v) was produced by Bottle 4 (35% of water). Bottle 2 (15% of water) and Bottle 3 (25% of water) had $0.91 \pm 0.01\%$ and $0.96 \pm 0.01\%$ of bioethanol concentrations, respectively. The bioethanol concentration varied directly to the water quantity added. The different quantities of water introduced to the CP hydrolysates gave different bioethanol concentration values, which were significant at $p < 0.05$.

As shown in Table 3, the mean TSS of the fermented cassava broths was lower than before fermentation ($p < 0.05$). Among the fermented CP broths, Bottle 1 exhibited the highest value of TSS, followed by Bottles 2, 3 and 4, respectively. Comparison of the TSS of the fermented CP broth across the different bottles was significant ($p < 0.05$). Also as shown in Table 3, the mean pH values prior to fermentation were greater compared to the post-fermentation readings ($p < 0.05$). At the end of fermentation, Bottle 4 had the highest pH compared to the others, followed by Bottles 3 and 2, with Bottle 1 having the lowest. These differences in the pH of the fermented CP broths across the different bottles were significant ($p < 0.05$).

4.3 Effect of water treatment on glucose, TRS and bioethanol yields

The effect of varied quantities of water (0%, 15%, 25% and 35%) on glucose, TRS and bioethanol yields from CP are depicted in Table 4 and Figure 3, respectively. It is evident in Table 4, that the mean glucose and TRS yield from the CP after fermentation were statistically insignificant ($p > 0.05$). The fermentation of Bottle 4 produced the highest bioethanol yield, followed by that of Bottle 3, Bottle 2 and Bottle 1, respectively ($p < 0.05$).


4.4 Effect of water (%) content on fermentation efficiency and ethanol production

The effects of water content variation (0%, 15%, 25% and 35%) on FE (%) and ethanol production ($\text{g L}^{-1} \text{ h}^{-1}$) of CP are shown in Figure 4. The highest mean FE and ethanol production was observed in Bottle 4 being $17.38 \pm 0.30\%$ and $0.139 \pm 0.003 \text{ g L}^{-1} \text{ h}^{-1}$, this was followed sequentially by Bottle 3 ($16.56 \pm 0.18\%$, $0.133 \pm 0.002 \text{ g L}^{-1} \text{ h}^{-1}$) and Bottle 2 ($15.68 \pm 0.17\%$, $0.126 \pm 0.001 \text{ g L}^{-1} \text{ h}^{-1}$), respectively, with Bottle 1 being the least ($15.21 \pm 0.06\%$, $0.123 \pm 0.002 \text{ g L}^{-1} \text{ h}^{-1}$). At $p < 0.05$, these outcomes were significantly different.

Parameter (amount of water %)	Total soluble solids (TSS) g/100g (°Bx)		pH		Glucose concentration % (w/v) [g/100mL]		
	Initial	After	Initial	After	0hr	24hrs	48hrs 72hrs
Bottle 1 (0%) control	27.35 ± 0.12 _b	14.79 ± 0.07 _c	5.50 ± 0.00 _a	4.39 ± 0.06 _a	1.90 ± 0.01 _a	1.10 ± 0.01 _c	0.32 ± 0.01 _a 0.04 ± 0.01 _a
Bottle 2 (15%)	27.36 ± 0.09 _b	14.04 ± 0.19 _b	5.50 ± 0.00 _a	4.45 ± 0.05 _{ab}	1.90 ± 0.01 _a	1.09 ± 0.01 _{bc}	0.31 ± 0.01 _a 0.04 ± 0.00 _a
Bottle 3 (25%)	27.20 ± 0.08 _{ab}	8.84 ± 0.09 _a	5.50 ± 0.00 _a	4.54 ± 0.05 _b	1.90 ± 0.01 _a	1.07 ± 0.01 _{ab}	0.31 ± 0.01 _a 0.04 ± 0.01 _a
Bottle 4 (35%)	27.04 ± 0.10 _a	8.56 ± 0.06 _a	5.50 ± 0.00 _a	4.69 ± 0.03 _c	1.90 ± 0.01 _a	1.06 ± 0.01 _a	0.31 ± 0.01 _a 0.03 ± 0.01 _a
F value	7.14	2504.87	0.00	21.83	0.00	10.19	2.22 2.22
p value	*0.012	*0.000	1.000	*0.000	1.000	*0.004	0.163 0.163
Parameter (amount of water %)	Total reducing sugars concentration % (w/v) [g/100mL]		Ethanol concentration % (w/v) [g/100mL]				
	0hr	24hrs	48hrs	72hrs	0hr	24hrs	48hrs 72hrs
Bottle 1 (0%) control	3.59 ± 0.11 _a	2.65 ± 0.08 _b	1.54 ± 0.09 _b	0.56 ± 0.10 _a	0.00 ± 0.00	0.49 ± 0.01 _a	0.52 ± 0.01 _a 0.89 ± 0.01 _a
Bottle 2 (15%)	3.56 ± 0.12 _a	2.59 ± 0.09 _{ab}	1.46 ± 0.06 _b	0.53 ± 0.07 _a	0.00 ± 0.00	0.50 ± 0.01 _a	0.54 ± 0.01 _b 0.91 ± 0.01 _a
Bottle 3 (25%)	3.58 ± 0.12 _a	2.51 ± 0.05 _{ab}	1.38 ± 0.06 _{ab}	0.49 ± 0.08 _a	0.00 ± 0.00	0.52 ± 0.01 _b	0.62 ± 0.01 _c 0.96 ± 0.01 _b
Bottle 4 (35%)	3.59 ± 0.11 _a	2.44 ± 0.07 _a	1.25 ± 0.06 _a	0.40 ± 0.09 _a	0.00 ± 0.00	0.54 ± 0.01 _c	0.74 ± 0.01 _d 1.00 ± 0.02 _c
F value	0.05	4.84	9.38	1.98	—	59.83	589.50 57.57
p value	0.986	*0.033	*0.005	0.195	—	*0.000	*0.000 *0.000
Note(s): Different letters (a, b, c and d) indicate significant differences along the columns							
*Significant at <i>p</i> = 0.05							
Source(s): Authors work							

Table 3.
Effect of water quantity on the mean concentrations of bioethanol, total soluble solids and pH of Cassava peels (fermentation at 30°C) (Mean ± SD, n = 3)

Figure 2.
Mean ethanol
concentration obtained
at various hydration
levels

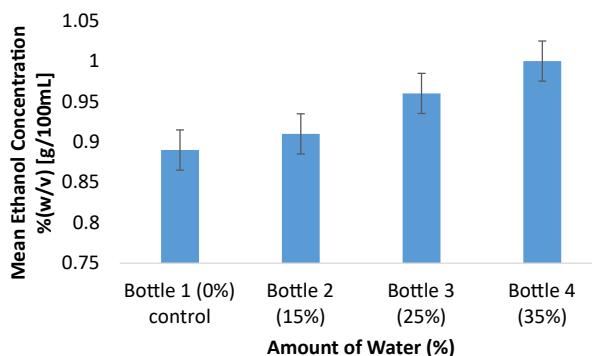

Source(s): Authors work

4.5 Distillation results for laboratory studies

The results of the mean volume of ethanol obtained from the different treatment groups (Bottle 1–4) are depicted in [Figure 5\(a\)](#). Bottle 4 gave the highest mean volume of ethanol recovery of 54.33 ± 4.01 ml while the lowest mean volume of 36.20 ± 1.50 ml was found in Bottle 1. The differences in the mean volume of ethanol recovered in the various treatment groups were statistically significant at $p < 0.05$. Likewise, the mean percentage ethanol concentration by volume (% v/v) obtained from the different treatment groups is depicted in [Figure 5\(b\)](#). The highest mean volume of ethanol concentration (% v/v) was obtained in Bottle 4 (30.67 ± 1.57 v/v) while the least value was obtained in Bottle 1 (28.49 ± 0.27 v/v) ($p < 0.05$). Last but not least, [Figure 5\(c\)](#) displayed the mean percentage ethanol yield achieved from the various treatment samples. Bottle 4 gave the best percentage ethanol yield of $54.78 \pm 0.72\%$ while the least value was found in Bottle 1 ($48.25 \pm 0.90\%$). At $p < 0.05$, these variations were determined to be significant.

5. Discussion


Saccharomyces cerevisiae, the key player in the industrial ethanol production among a variety of yeasts that produce ethanol through sugar fermentation, is essentially synonymous with the term “alcoholic fermentation” ([Parapouli et al., 2020](#)). Under anaerobic conditions, *S. cerevisiae* uses glycolysis to catabolize sugars, reaching the step of pyruvic acid formation. In the process that follows, the latter is changed by pyruvate decarboxylase into acetaldehyde and carbon dioxide, which is then reduced to ethanol by alcohol dehydrogenase while simultaneously releasing NAD^+ . As a result, the terminal step reactions that result in ethanol are crucial and serve as the foundation for significant fermentation industries ([Walker, 2004](#)).

CP is a cheap and affordable source of nutrients for the fermenting bacteria as well as energy for animals. Many carbohydrates (simple sugars) can be produced when a certain yeast strain ferments CP in a fermentation media ([Nuwamanya et al., 2012](#)). Using *S. cerevisiae* to produce simple sugars from CP under controlled conditions will require process parameter optimization, which could increase bioethanol yield. This study led to the conclusion that CP might be used as a source of carbon energy for the yeast that is fermenting to produce ethanol ([Chibuzor, Uyoh, & Igile, 2016](#)). The selection of yeast for this study may have been influenced by its greater tolerance for acidic environments and low pH levels than other microbes, such as bacteria. It has been documented that *S. cerevisiae* can be isolated from fermented CP ([Mariam, Manzoor, Ali, & Ul-Haq, 2009](#)). [Table 3](#) shows that the pH range of the CP hydrolysate before and after fermentation in this investigation dropped from 5.50 to 4.39,

Parameter (amount of water %)	0hr	Glucose yield [g/kg]			Total reducing sugars (TRS) yield [g/kg]			Ethanol yield [mL/kg]			
		24hrs	48hrs	72hrs	0hr	24hrs	48hrs	0hr	24hrs	48hrs	72hrs
Bottle 1 (0%)	118.70 ± 0.49 _a	6858 ± 0.41 _c	1988 ± 0.29 _a	2.77 ± 0.38 _a	224.27 ± 7.83 _a	165.35 ± 4.99 _b	96.44 ± 5.99 _b	0.00 ± 0.00	48.18 ± 1.17 _a	50.98 ± 1.41 _a	87.31 ± 2.44 _a
Control											
Bottle 2 (15%)	118.64 ± 0.36 _a	6785 ± 0.52 _{bc}	1956 ± 0.33 _a	2.46 ± 0.28 _a	222.44 ± 7.81 _a	161.98 ± 5.36 _{ab}	91.48 ± 4.00 _b	0.00 ± 0.00	50.78 ± 0.88 _a	55.03 ± 1.11 _b	92.44 ± 1.55 _a
Bottle 3 (25%)	118.73 ± 0.46 _a	6704 ± 0.54 _{ab}	1936 ± 0.25 _a	2.23 ± 0.31 _a	223.92 ± 7.69 _a	157.00 ± 2.91 _{ab}	85.98 ± 3.52 _{ab}	0.00 ± 0.00	54.11 ± 1.45 _b	63.87 ± 1.70 _c	99.30 ± 2.62 _c
Bottle 4 (35%)	118.69 ± 0.39 _a	6631 ± 0.60 _a	1915 ± 0.28 _a	1.96 ± 0.38 _a	224.46 ± 6.87 _a	152.40 ± 4.09 _a	78.33 ± 4.03 _a	0.00 ± 0.00	57.96 ± 1.22 _c	78.59 ± 1.46 _d	107.22 ± 2.86 _d
F value	0.20	1068	3.44	3.04	0.64	4.91	8.99	2.00	37.68	217.79	38.24
p value	0.996	*0.004	0.072	0.093	0.612	*0.032	*0.006	0.193	*0.000	*0.000	*0.000
Note(s): Different letters (a, b, c and d) indicate significant differences along the columns											
*Significant at <i>p</i> = 0.05											
Source(s): Authors work											


Table 4.
Effect of water
treatments on the
glucose, total reducing
sugars and bioethanol
yields of Cassava peels
(fermentation at 30°C)
(Mean ± SD, n = 3)

Figure 3.
Comparison of mean
bioethanol yield of
cassava peels for
different water
quantity

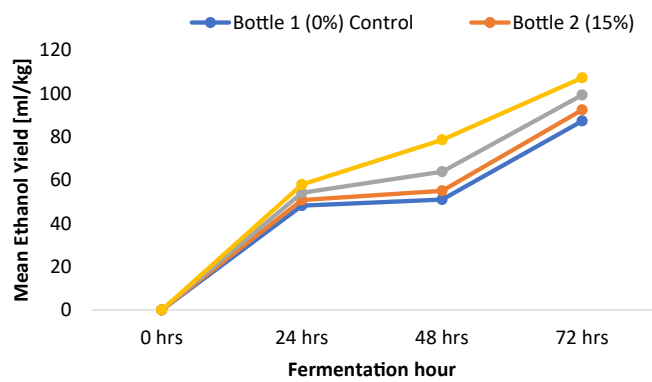

Source(s): Authors work


Figure 4.
Effect of water content
variation on
fermentation efficiency
and ethanol production
of cassava peels in the
laboratory studies

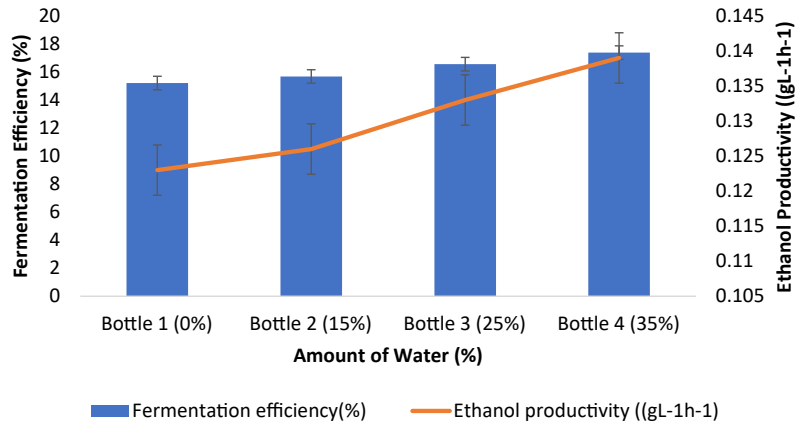

Source(s): Authors work

which remains within the acidic medium. The subsequent mixed fermentation process that the microorganisms went through and their capacity to make organic acids (acetic acid, lactic acid and succinic acid) in the fermentation medium may be what caused the pH value to decrease. Additionally, the pH can be lowered by the anaerobic conditions that the fermenting yeast creates in the fermenters (Adeleke, Akinyele, Olaniyi, & Jeff-Agboola, 2017; Adegbehingbe *et al.*, 2021). Due to its acidophilic nature, yeast often grows better in acidic environments. A pH range of 4.0 to 6.0 is ideal for its growth. Since the activity of biological components including enzymes, transport proteins and proteins bound to plasma membranes depends on optimum pH which is influenced by the presence of oxygen, temperature and yeast strain (Narendranath & Power, 2005).

Also, as evident in Tables 3 and 4, there is a rapid reduction in the glucose and TRS concentrations and yields during the fermentation period of all the treatment groups (Bottle 1–4). The decrease in reducing sugar in the yeast-inoculated CP can be attributed to the microorganisms' (*S. cerevisiae*) usage of the sugar as a carbon source for development and subsequent ethanol production (Adegbehingbe *et al.*, 2021). The results of this experiment were consistent with those of Adegunloye and Udenze (2017), who demonstrated a decrease

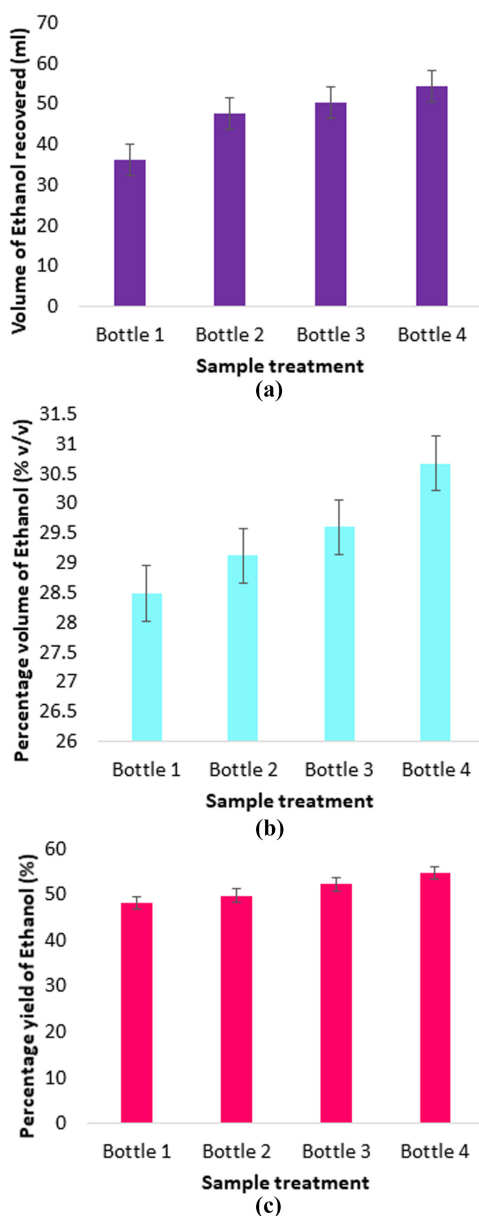

Source(s): Authors work

Figure 5.
(a) Mean volume of ethanol recovered (ml),
(b) Mean percentage volume of ethanol and
(c) Mean percentage yield of ethanol from the various sample treatments

in the TRS of co-culture fermented cocoyam peel. The authors also discussed how *S. cerevisiae*'s fast conversion of sugar to ethanol during the fermentation process might gradually reduce the sugar concentration to prevent feedback suppression of some molds' amylolytic activity at the start of the fermentation. Additionally, the inoculation of cell-free

CP hydrolysate with *S. cerevisiae* after being cultured for 72 h resulted in the highest amount of ethanol production in all the treatment groups (Bottle 1–4) as depicted in [Figure 3](#) and [Tables 3 and 4](#), respectively. The outcomes of this investigation are also in agreement with [Suryawati et al. \(2008\)](#) and [Faga, Wilkins, and Banat \(2010\)](#), who discovered that 72 h was the optimum amount of time for several strains of thermotolerant yeasts to produce the maximum ethanol. According to a significant amount of research that is available, optimal bioethanol synthesis from a variety of feedstocks is accomplished after 72 h of fermentation ([Kim et al., 2014](#); [Karagoz & Ozkan, 2014](#)).

Essentially, water is necessary for the fermentation process. Hypertonic sugar media significantly affect cell physiology, which can lead to osmotic stress (reduced water availability) on cells. Water activity (aw) in *S. cerevisiae* cells must be high and must be at least 0.65. Yeast cells can overproduce glycerol or other osmolytes, such as trehalose, in response to a lack of moisture, acting as a buffer to prevent yeast cells from dehydrating ([Graeme & Graham, 2016](#)). These substances can efficiently replenish cell volume, replace lost cellular water and support the continuation of yeast metabolism. Nevertheless, excessive glycerol production could result in lower ethanol yields in elevated gravity fermentations. This study evaluated the impact of water content on the ethanol generation of CP at four different levels: 0% (control), 15%, 25% and 35%. According to the findings, which are represented in [Figures 2, 3 and 5](#); [Tables 3 and 4](#), the samples handled with the maximum water volume (35%) in the laboratory investigation produced the highest percentage volumes, concentrations and yields of ethanol. Thus, suffice it to say that in the laboratory investigation, a water content of 35% was ideal for the efficient generation of ethanol from CP at a fermentation temperature of 30 °C. It is obvious that a rise in water volume causes a rise in bioethanol concentration. This conclusion is supported by [Hossain et al. \(2011\)](#)'s research, which produced a comparable outcome using fermented, rotten banana marsh. The sample that was treated with 35% water during fermentation at 35°C produced the highest amount of ethanol, according to the authors.

The results of the fermentation stage revealed the FE and EP obtained from the 20% CP at 72 h of fermentation for the various water treatments. The results obtained for these parameters from the laboratory study (as illustrated in [Figure 4](#)) show that Bottle 4 (35% water treatment) produced the highest FE and EP, respectively. This implies that the 35% hydration treatment provided an enabling environment that enhanced the fermenting efficiency and ethanol productivity of the yeast (*S. cerevisiae*). The highest ethanol concentration 1.00 ± 0.02 g/100 ml (10.00 ± 0.2 gL⁻¹) and FE (17.38 ± 0.30 %) obtained in this current work were however less than the values reported by [Zhu et al. \(2012\)](#) and [Kosugi et al. \(2009\)](#), respectively, using the separate hydrolysis and fermentation process. Also, deducing from [Figures 5a, 5b and 5c](#), the peak mean volume of ethanol recovery was 54.33 ± 4.01 ml, while the highest percentage ethanol concentration by volume was 30.67 ± 1.57 % (v/v) corresponding to a maximum percentage yield of 54.78 ± 0.72 % of the theoretical conversion after distillation. These figures were higher than the ethanol concentrations reported for various tuber crops, namely cassava, sweet potato, potato, yam, aroids, sugar beet, etc. by the yeast, *S. cerevisiae*, according to [Thatoi, Dash, Mohapatra, and Swain \(2014\)](#). The results of this experiment were also more significant than those of [Adegunloye and Udenze \(2017\)](#), who found that cocoyam peel fermented with *A. niger* and *S. cerevisiae* produced an ethanol yield of 6% at its highest. However, the value obtained in the present work was lower compared to the peak ethanol concentration of 41 % (v/v) and peak yield of 14.46 ± 2.08 g/cm³ given by [Chibuzor et al. \(2016\)](#) when CP cultivar TME 4779 was treated with *Rhizopus nigricans*, *Spirogyra africana* and *S. cerevisiae*, respectively.

According to [Oyeleke, Dauda, Oyewole, Okoliegebe, and Ojebode \(2012\)](#), the highest bioethanol yield can be obtained from CP by hydrolyzing it with *Pleurotus ostreatus* and *Gloeophyllum sepiarium* and fermenting it with *S. cerevisiae* and *Zymomonas mobilis* to produce bioethanol. [Akponah and Akpomie \(2011\)](#) also showed that hydrolysis of CP with acid prior to fermentation by *S. cerevisiae* gave the highest yield of bioethanol of 17.52% v/w ethanol,

compared to ethanol yield produced from enzyme hydrolysis (4.07% v/w) at 24 h of fermentation time and amylolytic fungi (10.5% v/w). A report by [Abidin, Saraswati, and Naid \(2014\)](#), on the optimal fermentation timing of CP, depicted that the optimal fermentation time of CP hydrolyzed by 0.5 M sulphuric acid solution was 4 days which resulted in 3.58% v/v bioethanol produced. [Abdelrahman, Christopher, Gregory, and Chenyu \(2020\)](#) improved the productivity of bioethanol production using marine yeast and seawater-based media. The authors reported that *S. cerevisiae* AZ65 grew well in media containing up to 10.5% (w/v) sea salts and 20% (w/v) glucose compared with an industrial distiller's strain, *S. cerevisiae* NCYC2592. A multi-stage batch fermentation process was also investigated to increase ethanol productivity. Two different seawater-based media were used: SW-YPD medium and SW-molasses medium. *S. cerevisiae* AZ65 achieved an ethanol concentration of 113.52 gL⁻¹ with a productivity of 4.15 g L⁻¹h⁻¹ using SW-YPD medium and an ethanol concentration of 50.32 gL⁻¹ with a productivity of 2.46 g L⁻¹h⁻¹ using SW-molasses medium. These results confirmed the potential of seawater and marine yeasts for implementation in the bioethanol industry using a multi-stage fermentation process. Other authors have demonstrated the use of marine yeast strains for bioethanol production using freshwater ([O'Neil et al., 2014](#); [Spang, Moomaw, Gallagher, Kirshen, & Marks, 2014](#)).

Despite the fact that *S. cerevisiae* is the most common sugar fermenter, other yeast species can also produce bioethanol from sugar fermentation ([Walker & Walker, 2018](#)). Among other uses, the generation of bioethanol from polyfructan substrates has been studied by *Kluyveromyces marxianus* ([Flores et al., 2013](#)). The use of yeasts that are tolerant to inhibitors would improve the efficiency of ethanol production on an industrial scale ([Tofighi, Assadi, Asadirad, & Karizi, 2014](#)), and the frequent difficulties of yeasts can be overcome by utilizing yeast that is tolerant to ethanol and thermostability. Using hybrid, genetically modified, or co-cultures of two yeast strains, pentose fermentation issues can be resolved. Pentose and hexose carbohydrates are concurrently fermented to ethanol using hybrid yeast strains. The hybrid strain was created by combining *S. cerevisiae* protoplast with xylose-fermenting yeast protoplast from *P. tannophilus*, *C. shehatae* and *P. stipitis* ([Kumari & Pramanik, 2013](#)). High-yield bioethanol production from xylose has been achieved using genetically modified *S. cerevisiae* and co-culture of two strains. The recombinant DNA technique is used in genetic engineering to up-regulate stress tolerance genes in order to overcome restrictive circumstances ([Dogan, Demirci, Aytekin, & Sahin, 2014](#)).

5.1 Limitations of the study

Although *S. cerevisiae* was able to optimize changes in hydration level utilizing the SHCF approach to produce a highly promising yield of bioethanol from CP, this study still has a number of drawbacks. First off, the study exclusively uses CP as the carbon substrate, which could restrict how broadly the results can be applied to other substrates. Second, the study fails to examine the impact of other production techniques, Simultaneously Saccharification and Co-Fermentation (SSCF) process; and production factors, such as temperature, sugar concentration, pH, fermentation time, agitation rate and inoculum size, on yeast fermentation effectiveness and ethanol production. However, the work adds to the body of knowledge on the generation of biofuels by examining the impact of hydration level on the effectiveness of fermentation and ethanol production by *S. cerevisiae* in a mixture of hexose and pentose sugars. Additionally, the study offers particular conclusions on the ideal level of hydration for optimizing the yield of ethanol from CP, which may be helpful for industrial uses.

6. Conclusion

The effective application in the present study of *S. cerevisiae* as an ethanologenic agent to ferment efficiently CP hydrolysate leading to ethanol production was further corroborated.

For small-scale flask studies, the influence of the fermentation parameter (change in water content) was examined, and the ideal condition was established. The study affirmed that the water treatment of the CP hydrolysate gave the increasing ethanol concentration, ethanol yield and fermentation efficiency among the various treatment groups and the highest amount was achieved from 35% of water. For the same concentration of water, the maximum efficiency of fermentation ($17.38 \pm 0.30\%$) and the highest amount of ethanol production ($0.139 \pm 0.003 \text{ gL}^{-1}\text{h}^{-1}$) was achieved. As a result, this finding demonstrates that in order to design truly sustainable processes, research should go beyond simply identifying promising biocatalysts and figuring out the ideal conditions. Instead, it should be expanded to include a thorough analysis and the gradual scaling-up of this process to an industrial level.

References

- Abdelrahman, S. Z., Christopher, E. F., Gregory, A. T., & Chenyu, D. (2020). Improving the productivity of bioethanol production using marine yeast and seawater-based media. *Biomass and Bioenergy*, 139, 105615, ISSN 0961-9534. doi: [10.1016/j.biombioe.2020.105615](https://doi.org/10.1016/j.biombioe.2020.105615).
- Abidin, Z., Saraswati, E., & Naid, T. (2014). Bioethanol production from waste of the cassava peel (manihot esculenta) by acid hydrolysis and fermentation process. *International Journal of PharmTech Research*, 6(4), 1209–1212, ISSN: 0974-4304.
- Abiodun, O. (2007). In *Biofuel opportunities and Development of renewable energies Markets in Africa 2007 conference*, Cape Town.
- Adegbeghinbe, K. T., Faparusi, F., & Adeleke, B. S. (2021). Bioethanol production from cassava peels inoculated with *Saccharomyces cerevisiae* and *Zymomonas mobilis*. *Journal of Advances in Microbiology*, 21(9), 58–67. doi: [10.9734/jamb/2021/v21i930384](https://doi.org/10.9734/jamb/2021/v21i930384).
- Adegunloye, D., & Udenze, D. (2017). Effect of fermentation on production of bioethanol from peels of cocoyam using *Aspergillus niger* and *Saccharomyces cerevisiae*. *Journal of Advances in Microbiology*, 4(2), 1–8. doi: [10.9734/JAMB/2017/34032](https://doi.org/10.9734/JAMB/2017/34032).
- Adeleke, B., Akinyele, B., Olaniyi, O., & Jeff-Agboola, Y. (2017). Effect of fermentation on chemical composition of cassava peels. *Asian Journal of Plant Sciences*, 7(1), 31–38.
- Akponah, E., & Akpomie, O. O. (2011). Analysis of the suitability of yam, potato and cassava root peels for bioethanol production using *Saccharomyces cerevisiae*. *International Research Journal of Microbiology*, 2(10), 393–398.
- Al-Mamun, M. R., Roy, H., Islam, M. S., Ali, M. R., Hossain, M. I., Aly, M. A. S., . . . Awual, M. R. (2023). State-of-the-art in solar water heating (SWH) systems for sustainable solar energy utilization: A comprehensive review. *Solar Energy*, 264, 111998. doi: [10.1016/j.solener.2023.111998](https://doi.org/10.1016/j.solener.2023.111998).
- Ana, G. R. E. E., & Sokan-Adeaga, A. A. (2015). Bio-ethanol yield from selected lignocellulosic wastes. *International Journal of Sustainable and Green Energy (IJSGE)*, 4(4), 141–149. doi: [10.11648/j.ijrse.20150404.13](https://doi.org/10.11648/j.ijrse.20150404.13).
- Association of Official Analytical Chemists (AOAC, 1984, 1990, 1998) (1984). Official methods of analysis. Association Official Analytical Chemists, Official Methods of Analysis, 14.023, A.O.A.C., Rockville, Maryland.
- Association of Official Analytical Chemists (AOAC) (2000). *Official methods of analysis* (17th Edition). Gaithersburg, MD: The Association of Official Analytical Chemists. Methods 925.10, 65.17, 974.24, 992.1.
- Association of Official Analytical Chemists (AOAC) (2012). *Official methods of analysis* (19th edition). Gaithersburg, MD: Association of Official Analytical Chemists.
- Bolade, D. O., Ana, G. R. E. E., Lateef, S. A., & Sokan-Adeaga, A. A. (2019). Exploration of the bioethanol yield of single and multi-substrate biomass from cassava processing wastes. *Journal of Solid Waste Technology and Management (JSWTM)*, 45(3), 305–314, (10). doi: [10.5276/jswtm/2019.305](https://doi.org/10.5276/jswtm/2019.305).

- Chibuzor, O., Uyoh, E. A., & Igile, G. (2016). Bioethanol production from cassava peels using different microbial inoculants. *African Journal of Biotechnology*, 15(30), 1608–1612. doi: [10.5897/AJB2016.15391](https://doi.org/10.5897/AJB2016.15391).
- da Silva Fernandes, F., de Souza, É.S., Carneiro, L. M., Alves Silva, J. P., de Souza, J. V. B., & da Silva Batista, J. (2022). Current ethanol production requirements for the yeast *Saccharomyces cerevisiae*. *International Journal of Microbiology*, 13, 14, 7878830. doi: [10.1155/2022/7878830](https://doi.org/10.1155/2022/7878830) PMID:35996633; PMCID: PMC9392646.
- Demirbas, A. (2008). Biofuels sources, biofuel policy, biofuel economy and global biofuel projections. *Energy Conversion and Management*, 49(8), 2106–2116. doi: [10.1016/j.enconman.2008.02.020](https://doi.org/10.1016/j.enconman.2008.02.020).
- Dien, B. S., Cotta, M. A., & Jeffries, T. W. (2003). Bacteria engineered for fuel ethanol production: Current status. *Applied Microbiology and Biotechnology*, 63(3), 258–266. doi: [10.1007/s00253-003-1444-y](https://doi.org/10.1007/s00253-003-1444-y).
- Dogan, A., Demirci, S., Aytekin, A. O., & Sahin, F. (2014). Improvements of tolerance to stress conditions by genetic engineering in *Saccharomyces cerevisiae* during ethanol production. *Applied Biochemistry and Biotechnology*, 174(1), 28–42. doi: [10.1007/s12010-014-1006-z](https://doi.org/10.1007/s12010-014-1006-z).
- Dubois, M., Gilles, A. M., Hamilton, J. K., Rebers, P. A., & Smith, F. (1956). Colorimetric method for determination of sugars and related substances. *Analytical Chemistry*, 28(3), 350–356. doi: [10.1021/ac60111a017](https://doi.org/10.1021/ac60111a017).
- Duncan, D. B. (1955). Multiple range and Multiple F-tests. *Biometrics*, 11, 1–42. doi: [10.2307/3001478](https://doi.org/10.2307/3001478).
- Elijah, I. O. (2010). Emerging bio-ethanol projects in Nigeria. Their opportunities and challenges. *Energy Policy Reviews*, 2010, 38(11), 7161–7168. doi: [10.1016/j.enpol.2010.07.038](https://doi.org/10.1016/j.enpol.2010.07.038).
- Faga, B. A., Wilkins, M. R., & Banat, I. M. (2010). Ethanol production through simultaneous saccharification and fermentation of switchgrass using *Saccharomyces cerevisiae* D5A and thermotolerant *Kluyveromyces marxianus* IMB strains. *Bioresource Technology*, 101(7), 2273–2279. doi: [10.1016/j.biortech.2009.11.001](https://doi.org/10.1016/j.biortech.2009.11.001).
- Farone, W. A., & Cuzens, J. E. (1996a). Method of producing sugars using strong acid hydrolysis of cellulosic and hemicellulosic materials. Arkenol, US Patent No. 5 562 777.
- Farone, W. A., & Cuzens, J. E. (1996b). Method of separating acids and sugars resulting from strong acid hydrolysis. USA. US Patent No. 5 580 389.
- Flores, J. A., Gschaedler, A., Amaya-Delgado, L., Herrera-López, E. J., Arellano, M., & Arrizon, J. (2013). Simultaneous saccharification and fermentation of Agave tequilana fructans by *Kluyveromyces marxianus* yeasts for bioethanol and tequila production. *Bioresource Technology*, 146, 267–273. doi: [10.1016/j.biortech.2013.07.078](https://doi.org/10.1016/j.biortech.2013.07.078).
- Graeme, M. W., & Graham, G. S. (2016). *Saccharomyces cerevisiae* in the production of fermented beverages. *Beverages*, 2(4), 30. doi: [10.3390/beverages2040030](https://doi.org/10.3390/beverages2040030).
- Hossain, A. B. M. S., Ahmed, S. A., Ahmed, M. A., Faris, M. A. A., Annuar, M. S. M., Hadeel, M., & Norah, H. (2011). Bioethanol fuel production from rotten banana as an environmental waste management and sustainable energy. *African Journal of Microbiology Research*, 5(6), 586–598. doi: [10.5897/AJMR10.231](https://doi.org/10.5897/AJMR10.231).
- Karagoz, P., & Ozkan, M. (2014). Ethanol production from wheat straw by *Saccharomyces cerevisiae* and *Scheffersomyces stipitis* co-culture in batch and continuous system. *Bioresource Technology*, 158, 286–293. doi: [10.1016/j.biortech.2014.02.022](https://doi.org/10.1016/j.biortech.2014.02.022).
- Kim, J. H., Ryu, J., Huh, I. Y., Hong, S. K., Kang, H. A., & Chang, Y. K. (2014). Ethanol production from galactose by a newly isolated *Saccharomyces cerevisiae* KL17. *Bioprocess and Biosystems Engineering*, 37(9), 1871–1878. doi: [10.1007/s00449-014-1161-1](https://doi.org/10.1007/s00449-014-1161-1).
- Kiran, B., Kumar, R., & Deshmukh, D. (2014). Perspectives of microalgal biofuels as a renewable source of energy. *Energy Conversion and Management*, 88, 1228–1244. doi: [10.1016/j.enconman.2014.06.022](https://doi.org/10.1016/j.enconman.2014.06.022).
- Kosugi, A., Kondo, A., Ueda, M., Murata, Y., Vaithanomsat, P., Thanapase, W., & Mori, Y. (2009). Production of ethanol from cassava pulp via fermentation with a surface-engineered yeast strain displaying glucoamylase. *Renewable Energy*, 34(5), 1354–1358. doi: [10.1016/j.renene.2008.09.002](https://doi.org/10.1016/j.renene.2008.09.002).

- Kumari, R., & Pramanik, K. (2013). Bioethanol production from *Ipomoea carnea* biomass using a potential hybrid yeast strain. *Applied Biochemistry and Biotechnology*, 171(3), 771–85. doi: [10.1007/s12010-013-0398-5](https://doi.org/10.1007/s12010-013-0398-5), Epub Jul 28. PMID: 23892623.
- Mariam, I., Manzoor, K., Ali, S., & Ul-Haq, I. (2009). Enhanced production of ethanol from free and immobilized *Saccharomyces cerevisiae* under stationary culture. *Pakistan Journal of Botany*, 41(2), 821–833.
- Mohd Azhar, S. H., Abdulla, R., Jambo, S. A., Marbawi, H., Gansau, J. A., Mohd Faik, A. A., & Rodrigues, K. F. (2017). Yeasts in sustainable bioethanol production: A review. *Biochemistry and Biophysics Reports*, 6(10), 52–61. doi: [10.1016/j.bbrep.2017.03.003](https://doi.org/10.1016/j.bbrep.2017.03.003), PMID: 29114570; PMCID: PMC5637245.
- Narendranath, N. V., & Power, R. (2005). Relationship between pH and medium dissolved solids in terms of growth and metabolism of *Lactobacilli* and *Saccharomyces cerevisiae* during ethanol production. *Applied and Environmental Microbiology*, 71(5), 2239–2243. doi: [10.1128/AEM.71.5.2239-2243.2005](https://doi.org/10.1128/AEM.71.5.2239-2243.2005).
- Nigam, P. S., & Singh, A. (2011). Production of liquid biofuels from renewable resources. *Progress in Energy and Combustion Science*, 37(1), 52–68. doi: [10.1016/j.pecs.2010.01.003](https://doi.org/10.1016/j.pecs.2010.01.003).
- Nuwamanya, E., Chiwona-Karlton, L., Kawuki, R. S., & Baguma, Y. (2012). Bio-ethanol production from non-food parts of cassava (*Manihot esculenta* Crantz). *AMBIO A Journal of the Human Environment*, 41(3), 262–270. doi: [10.1007/s13280-011-0183-z](https://doi.org/10.1007/s13280-011-0183-z).
- Onuoha, L. N., Nwafor, M. O. I., Igbokwe, J. O. and Aviara, N. A. (2019). Design, construction and performance evaluation of a small scale biofuel distiller. *Arid Zone Journal of Engineering, Technology and Environment*, June, 2019, 15(2), 207-225, ISSN1596-2490; e-ISSN 2545-5818.
- Oseji, E. M., Ana, G. R. E. E., & Sokan-Adeaga, A. A. (2017). Evaluation of biogas yield and microbial species from selected multi-biomass feedstocks in Nigeria. *London Journal Research Science (LJRS)*, 17(Issue 1), 1–19, Compilation 1.0/. doi: [10.17472/LJRSVOL17IS1PG1](https://doi.org/10.17472/LJRSVOL17IS1PG1).
- Oyeleke, S. B., Dauda, B. E. N., Oyewole, O. A., Okoliegbé, I. N., & Ojebode, T. (2012). Production of bioethanol from cassava and sweet potato peels. *Advances in Environmental Biology*, 6(1), 241–245.
- O'Neill, N., Pasquali, R., Vernon, R., & Niemi, A. (2014). Geological storage of CO₂ in the southern baltic sea. *Energy Procedia*, 59, 433–439, ISSN 1876-6102. doi: [10.1016/j.egypro.2014.10.399](https://doi.org/10.1016/j.egypro.2014.10.399).
- Parapouli, M., Vasileiadis, A., Afendra, A. S., & Hatziloukas, E. (2020). *Saccharomyces cerevisiae* and its industrial applications. *AIMS Microbiology*, Feb 11, 6(1), 1-31. doi: [10.3934/microbiol.2020001](https://doi.org/10.3934/microbiol.2020001), PMID: 32226912; PMCID: PMC7099199.
- Rafa, N., Ahmed, S. F., Badruddin, I. A., Mofijur, M., & Kamangar, S. (2021). Strategies to produce cost-effective third-generation biofuel from microalgae. *Frontiers in Energy Research*, 9, 749968. doi: [10.3389/fenrg.2021.749968](https://doi.org/10.3389/fenrg.2021.749968).
- Renewable Fuels Association US (2015). Global ethanol production. Available from: <http://www.afdc.energy.gov/data/10331> (accessed 2 May 2023).
- Reza, M. S., Afroze, S., Kuterbekov, K., Kabyshev, A., Zh. Bekmyrza, K., Taweekun, J., . . . Islam, M. S. (2023). Ex situ catalytic pyrolysis of invasive pennisetum purpureum grass with activated carbon for upgrading bio-oil. *Sustainability*, 15(9), 7628. doi: [10.3390/su15097628](https://doi.org/10.3390/su15097628).
- Sathish, T., & Singaravelu, D. K. (2020). Combustion analysis using third generation biofuels in diesel engine. *Journal of Scientific and Industrial Research (India)*, 79, 449–452.
- Sayyad, S. F., Chardhari, S. R., & Panda, B. P. (2015). Quantitative determination of ethanol in arishta by using UV visible spectrophotometer. *Pharmaceutical and Biological Evaluations*, 2(5), 204–207, ISSN 2394-0859.
- Shah, M. A., Hayder, G., Kumar, R., Kumar, V., Ahamad, T., Abul Kalam, Md., . . . Mubarak, N. M. (2023). Development of sustainable biomass residues for biofuels applications. *Scientific Reports*, 13(1), 14248. doi: [10.1038/s41598-023-41446-1](https://doi.org/10.1038/s41598-023-41446-1).
- Sokan-Adeaga, A. A. (2019). Waste quantification, characterization and exploration of bioethanol production potentials of some selected lignocelluloses wastes in ibadan, Nigeria. In A. MD.

- Sahadat Hossain, K. Vance, & H.A. Brenda (Eds.), *2018 ISWA-SWIS Winter School Proceedings eBook* (pp. 183–192). SWIS Publications. 978-0-9976542-2-6, (pp. 1–310). Published, Available from: <https://www.amazon.com/2018-ISWA-SWIS-WINTER-SCHOOL-PROCEEDINGS-ebook/dp/B07SH2P7QB> (accessed 29 May 2019).
- Sokan-Adeaga, A. A. (2022). *Nigeria's perennial energy crisis and the way forward*. Academia Letters. 5098, San Francisco, California. doi: [10.20935/AL5098](https://doi.org/10.20935/AL5098).
- Sokan-Adeaga, A. A., & Ana, G. R. E. E. (2015a). A comprehensive review of biomass resources and biofuels production in Nigeria: Potential and prospects. *Reviews on Environmental Health (REVEH)*, 30(3), 143–162. doi: [10.1515/reveh-2015-0015](https://doi.org/10.1515/reveh-2015-0015).
- Sokan-Adeaga, A. A., & Ana, G. R. E. E. (2015b). Source identification and characterization of lignocellulosic wastes from selected biomass sources in Ibadan, Nigeria. *Journal of Solid Waste Technology and Management (JSWTM)*, 41(3), 262–269, (8). doi: [10.5276/JSWTM.2015.262](https://doi.org/10.5276/JSWTM.2015.262).
- Sokan-Adeaga, A. A., & Ana, G. R. E. E. (2018). Bioconversion of some selected lignocelluloses into bioethanol – a form of waste management strategy. *Winning Essay and Extract of the Proceedings of ISWA-SWIS Winter School 2018, held at the University of Texas*, Arlington, 15 – 26 January, 2018 (pp. 1–10). Published by International Solid Waste Association (ISWA), ISWA SWIS Winter School 2018 Proceedings, Available from: <https://www.iswa.org/media/publications/knowledge-base/>
- Sokan-Adeaga, A. A., Ana, G. R. E. E., & Sokan-Adeaga, E. D. (2015). *Evaluation of bio-ethanol production potentials of selected lignocellulosic wastes* (Vol. 28, pp. 1–173). Bahnhofstraße: LAMBERT Academic Publishing (LAP), OmniScriptum GmbH & Co. KG. 978-3-659-79582-4. 66111, Saarbrücken Germany.
- Sokan-Adeaga, A. A., Ana, G. R. E. E., Sokan-Adeaga, M. A., & Sokan-Adeaga, E. D. (2016). Lignocelluloses: An economical and ecological resource for bio-ethanol production – a review. *International Journal of Natural Resource Ecology and Management*, 1(3), 128–144. doi: [10.11648/j.ijnrem.20160103.18](https://doi.org/10.11648/j.ijnrem.20160103.18).
- Sokan-Adeaga, A. A., Godson, R. E. E. A., & Olorunnisola, A. A. (2023). Temperature variations effect on bioethanol production from lignocellulosic biomass using locally developed small-scale production facility: A pilot study. In K.F.B. RameshMebarek-OudinaSouayah (Ed.), *In book: Mathematical Modelling of Fluid Dynamics and Nanofluids* (pp. 1–556). Publisher – CRC Press 2023, Taylor and Francis. 9781000933376, 1000933377, Chapter 14, page 215-249. doi: [10.1201/9781003299608-14](https://doi.org/10.1201/9781003299608-14).
- Spang, E. S., Moomaw, W. R., Gallagher, K. S., Kirshen, P. H., & Marks, D. H. (2014). The water consumption of energy production: An international comparison. *Environmental Research Letters*, 9(10), 105002. doi: [10.1088/1748-9326/9/10/105002](https://doi.org/10.1088/1748-9326/9/10/105002).
- Statistical Analysis System (1997). *Statistical analysis system, user guide. Ver.602*. Cary North Caroline: SAS Institute.
- Suryawati, L., Wilkins, M. R., Bellmer, D. D., Huhnke, R. L., Maness, N. O., & Banat, I. M. (2008). Simultaneous saccharification and fermentation of Kanlow switchgrass pretreated by hydrothermolysis using *Kluyveromyces marxianus* IMB4. *Biotechnology and Bioengineering*, 101(5), 894–902. doi: [10.1002/bit.21965](https://doi.org/10.1002/bit.21965).
- Tan, K. T., Lee, K. T., & Mohamed, A. R. (2008). Role of energy policy in renewable energy accomplishment: The case of second-generation bioethanol. *Energy Policy*, 36(9), 3360–3365. doi: [10.1016/j.enpol.2008.05.016](https://doi.org/10.1016/j.enpol.2008.05.016).
- Thatoi, H., Dash, P. K., Mohapatra, S., & Swain, M. R. (2014). Bioethanol production from tuber crops using fermentation technology: A review. *International Journal of Sustainable Energy*, 35(5), 443–468. doi: [10.1080/14786451.2014.918616](https://doi.org/10.1080/14786451.2014.918616).
- Tofighi, A., Assadi, M. M., Asadirad, M. H. A., & Karizi, S. Z. (2014). Bio-ethanol production by a novel autochthonous thermo-tolerant yeast isolated from wastewater. *Journal of Environmental Health Science and Engineering*, 12(1), 107. doi: [10.1186/2052-336X-12-107](https://doi.org/10.1186/2052-336X-12-107).

- Tshizanga, N., Aransiola, E. F., & Oyekola, O. (2017). Optimisation of biodiesel production from waste vegetable oil and eggshell ash. *South African Journal of Chemical Engineering*, 23, 145–156. doi: [10.1016/j.sajce.2017.05.003](https://doi.org/10.1016/j.sajce.2017.05.003).
- Walker, G. M. (2004). Metals in yeast fermentation processes. *Advances in Applied Microbiology*. *Advances in Applied Microbiology*, 54, 197–229. doi: [10.1016/S0065-2164\(04\)54008-X](https://doi.org/10.1016/S0065-2164(04)54008-X).
- Walker, G. M., & Walker, R. S. (2018). Enhancing yeast alcoholic fermentations. *Advances in Applied Microbiology*, 105, 87–129. doi: [10.1016/bs.aambs.2018.05.003](https://doi.org/10.1016/bs.aambs.2018.05.003).
- Yin, Z., Zhu, L., Li, S., Hu, T., Chu, R., Mo, F., . . . Li, B. (2020). A comprehensive review on cultivation and harvesting of microalgae for biodiesel production: Environmental pollution control and future directions. *Bioresource Technology*, 301(122804), 122804, ISSN 0960-8524. doi: [10.1016/j.biortech.2020.122804](https://doi.org/10.1016/j.biortech.2020.122804).
- Zhu, M., Li, P., Gong, X., & Wang, J. (2012). A comparison of the production of ethanol between simultaneous saccharification and fermentation and separate hydrolysis and fermentation using unpretreated cassava pulp and enzyme cocktail. *Bioscience, Biotechnology and Biochemistry*, 76(4), 671–678. doi: [10.1271/bbb.110750](https://doi.org/10.1271/bbb.110750).

About the authors

Dr. Adewale Allen Sokan-Adeaga is Public/Environmental Health Consultant. He holds a Ph.D. in Public Health with specialisation in Environmental Health from the University of Ibadan, Ibadan, Nigeria. He is Senior Lecturer at the Department of Environmental Health Science, Ajayi Crowther University, Oyo, Nigeria. His areas of research and interest include solid waste management with bias in lignocellulosic wastes, biomass utilization, environmental impact assessment and pollution control, biofuels and climate change studies. Dr Sokan-Adeaga is a recipient of the globally acclaimed ISWA-SWIS Essay Competition Award Winner in 2018 and also the University of Ibadan, Postgraduate School Award (2015-2018). He is an honorary Fellow of Medical Research Council (FMRC), USA (2019) and member of many international and national bodies, namely Asian Council of Science Editors (ACSE), the prestigious London Journals Press Franklin Membership, UK; African Early Career Scientists; Young African Leaders Initiative (YALI) Network, USA and Environmental Health Scientists Association of Nigeria (EHSAN). He is registered and licensed Environmental Health Specialist with the Environmental Health Officers Registration Council of Nigeria. He has published several of his research findings in various local and international peer-reviewed journals. He serves as member of Editorial Board for *Trends in Medical Research*, *Science International* and also has been External Reviewer for *Reviews on Environmental Health (REVEH)*, Walter de Gruyter, Germany, *Journal of Public Health Research* and many other reputable journals. Adewale Allen Sokan-Adeaga is the corresponding author and can be contacted at: sokanadeaga.adewaleallen@yahoo.com

Godson R.E.E. Ana is Professor in the Department of Environmental Health Sciences, Faculty of Public Health at the University of Ibadan, Ibadan, Nigeria. His primary area of research focus is in air quality management and exposure assessment. He is also involved in other research activities, including waste management, renewable energy, industrial hygiene and safety, children's environment and climate change. He has attended several professional courses related to air pollution and climate change including renewable energy, indoor air pollution, atmospheres and climate change courses in India, the USA and France, respectively. He is a recipient of a TWAS fellowship on atmospheric toxicology in India and SIDA grant on air pollution management in Sweden and Chile. He was a UNESCO/TWAS sponsored visiting scientist at the Institute of Atmospheric Physics in the Chinese Academy of Science, Beijing, China. He has provided leadership in the measurements of atmospheric TSP, PM₁₀, PM_{2.5}, priority gaseous pollutants, heavy metals and polycyclic aromatic hydrocarbons, particularly in the Niger Delta area and South-western parts of Nigeria. He has carried out indoor air pollution and exposure assessments involving women and children exposed to biomass emissions. He has piloted and participated in several air pollution control initiatives including use of a hybrid of blended fuels and activated carbon in generator emission control as well as the switch to ethanol-fueled cooking stoves. He has published widely both locally and internationally in reputable peer reviewed journals, book chapters, technical reports and monographs. Godson Ana was the pioneer Coordinator and acting Head of the Department of Environmental Health Sciences as well as the pioneer Coordinator of the Climate and Society program of the Centre for Sustainable Development at the University of Ibadan. He is

currently the President of the Environmental Health Scientists Association in Nigeria and a member of the Africa Academy of Environmental Health. He is registered and licensed Environmental Health Practitioner with the Environmental Health Officers Registration Council of Nigeria. He is a consultant to several local and international organizations on environmental issues.

Professor Abel Olajide Olorunnisola holds a Bachelor of Engineering (Honours) degree in Agricultural Engineering (1989) as well as Master's (1992) and Ph.D. (1997) degrees in Wood Products Engineering. He also holds a professional diploma in management obtained from the Nigerian Institute of Management in 1999. He joined the services of the University of Ibadan (UI) on January 2, 1993, and rose through the ranks to become a full professor on October 1, 2006. He served as the Dean of the Postgraduate School of UI between 2010 and 2014, when he concurrently served as the Chairman of the Nigerian Society of Engineers, Ibadan Branch (2010 – 2011) and President of the Materials Science and Technology Society of Nigeria (2010 –2014). He also served as the pioneer Head of the Department of Wood Products Engineering between 2017 and 2021, when he concurrently served as the Chairman of the Nigerian Institute of Management (Chartered), Ibadan Branch. He was also a member of the Governing Council of the UI between 2019 and 2021. Professor Olorunnisola is registered as an engineer by the Council for the Regulation of Engineering in Nigeria (COREN) and holds fellowships from the Nigerian Society of Engineers, the Nigerian Institute of Management and the Materials Science and Technology Society of Nigeria. His core areas of research expertise include environmental management and renewable energy studies, the development of sustainable materials for building construction and development of affordable agricultural processing machines using indigenous wood species for machine parts fabrication. He is currently a member of the International Network for Bamboo & Rattan (INBAR) Expert Taskforces on Bamboo for Renewable Energy, Rattan Uses and Development and Sustainable Bamboo Development. He is also a member of different International Organization for Standards (ISO) Technical Committees on Bamboo and Rattan standards -ISO/TC 296. He assumed duty as the Vice-Chancellor of Dominion University on November 1, 2021.

Dr. Micheal Ayodeji Sokan-Adeaga holds a Bachelor of Science (B.Sc.) degree in Microbiology from the prestigious Obafemi Awolowo University, Ile-Ife, Nigeria, and also a Bachelor of Medicine and Bachelor of Surgery (MBBS) degree from the University of Lagos, Lagos, Nigeria. He is an honorary Fellow of the Medical Research Council (FMRC), USA and a registered member of many international and national bodies, namely Asian Council of Science Editors (ACSE), the Young African Leaders Initiative (YALI) Network, USA etc. Also, he is a registered and licensed Medical Practitioner with the Medical and Dental Council of Nigeria (MDCN). He has published in both local and International peer-reviewed journals and book chapter. His areas of interest are environmental and general microbiology, general medicine and surgery and public health.

Hridoy Roy is an enthusiastic young researcher. He is doing his M.Sc. in Chemical Engineering from the Bangladesh University of Engineering and Technology (BUET). Currently, he is serving as Lecturer at the same Department. He published 28 peer-reviewed journal articles. He is experienced in environmental, energy and biomaterial-related projects. His current research received topics include synthesis of biomaterials, nano-composite adsorbents, pyrolysis products and energy materials.

Dr. Md Sumon Reza completed his Ph.D. in the Faculty of Integrated Technologies at Universiti Brunei Darussalam. His research expertise is in solid waste management, biomass, bioenergy, pyrolysis, gasification, biochar, biofuel, activated carbon and catalytic pyrolysis. Currently, he is working as Postdoctoral Research Fellow at the Research Institute of New Chemical Technologies, Faculty of Natural Sciences, L.N. Gumilyov Eurasian National University, Astana 010008, Kazakhstan.

Dr. Md. Shahinoor Islam is Professor and Chairman of the Department of Chemical Engineering at the Bangladesh University of Engineering and Technology (BUET). He received his B.Sc. and M.Sc. in Chemical Engineering from BUET in 2002 and 2007, respectively. He pursued his Ph.D. in environmental engineering from the University of Alberta in 2014. Dr. Islam worked as Postdoctoral Fellow for a year (2014–2015) and worked as Visiting Professor (2018) at the University of Alberta. He published a total of 73 peer-reviewed articles in highly ranked journals with 3,261 Google Scholar citations. His research area covers industrial wastewater treatment using nanocomposites, biochar, biological, photocatalytic and electrochemical processes.

Author Affiliations

Adewale Allen Sokan-Adeaga, Department of Environmental Health Sciences, Faculty of Public Health, College of Medicine, University of Ibadan, Ibadan, Nigeria; Department of Environmental Health Science, Faculty of Public Health, Lead City University, Ibadan, Nigeria and Department of Environmental Health Science, Faculty of Basic Medical Sciences, Ajayi Crowther University, Oyo, Nigeria

Godson R.E.E. Ana, Department of Environmental Health Sciences, Faculty of Public Health, College of Medicine, University of Ibadan, Ibadan, Nigeria

Abel Olajide Olorunnisola, Department of Wood Products Engineering, Faculty of Technology, University of Ibadan, Ibadan, Nigeria

Micheal Ayodeji Sokan-Adeaga, Department of Microbiology, Environmental Microbiology Unit, Faculty of Science, Obafemi Awolowo University, Ile-Ife, Nigeria and Department of Microbiology, General Microbiology Unit, Faculty of Science, University of Ibadan, Ibadan, Nigeria

Hridoy Roy, Department of Chemical Engineering, Bangladesh University of Engineering and Technology, Dhaka, Bangladesh

Md Sumon Reza, Faculty of Natural Sciences, Research Institute of New Chemical Technologies, L.N. Gumilyov Eurasian National University, Astana, Kazakhstan and Department of Civil Engineering, East West University, Dhaka, Bangladesh

Md. Shahinoor Islam, Department of Chemical Engineering, Bangladesh University of Engineering and Technology, Dhaka, Bangladesh

For instructions on how to order reprints of this article, please visit our website:

www.emeraldgroupublishing.com/licensing/reprints.htm

Or contact us for further details: permissions@emeraldinsight.com